

Autotrol Performa™ Cv

Conditioner/Filter

Water Control System

Installation, Operation and Maintenance Manual

1 n a :



Table of Contents

1.0	၈၈၀	၈	3						
1.1	၈	3							
1.2	I	၈၈	5						
1.3	၈	၈၈၀	C /F	၈						
1.4	D	၈	C	8					
2.0	၈၈၀	၈၈၀	9						
2.1	I	၈	၈၈၀	C	၈	F	၈	9	
2.2	၈၈၈	၈	A	၈	10				
2.3	C	၈၈၈	၈	16					
3.0	၈၈၀	F	၈	၈	C	, ၈၈၈F, ၈၈၈F	C, ၈၈၈F	18	
3.1	၈၈၈	၈	A	၈	18				
3.2	E _γ	၈၈	၈၈၈	၈	၈	၈၈၈	၈	C	24
4.0	၈၈၀	၈၈	၈၈	၈၈	G	၈	27		
4.1	G	၈	၈	27					
4.2	I	C	28						
4.3	၈၈၀	C	၈၈	D	၈၈	31			
5.0	၈၈၀	၈	၈	34					
5.1	H	၈	D	၈၈	34				
5.2	၈	V	၈	၈	35				
5.3	၈	၈	A	၈	36				
5.4	၈	၈	C	36					
5.5	I	၈	C	၈	38				
5.6	၈	D	၈	၈	38				
5.7	၈၈၀	C	F	D	၈၈	38			
5.8	၈၈၀	F	F	D	၈၈	40			
5.9	၈	41							
6.0	၈၈၀	၈	44						
6.1	၈	C	၈	E _γ	44				
6.2	၈	L	45						
6.3	၈၈၀	C	46						

1.0 Performa Cv System

1.1 Specifications

1.1.1 Performa Cv Conditioner

Flow Rates (Valve Only)

@ 15 (1.03 a)	25.0	η (5.7 η ^{3/4})
Ba a (C) @ 25 (1.72 a)	20.0	η (4.5 η ^{3/4})
	C = 6.5	(K = 5.58)
Ba a C	C = 4.0	(K = 3.46)

Control Configurations

962 Microprocessor Demand System and 962 Electronic Timeclock

Ba a	4	60 η
B	E	a a a
	7	125 η
Fa	2	19 η
E _γ a B a - η F		

Valve Connections/Dimensions

a a	2-1/2	- 8, η a
I ↓	E _γ 18.3()-19.D5.5(.-)	

1.1.2 Performa Cv Filter Specifications

Flow Rates (Valve Only)

@ 15 (1.03 a)	25.0	η (5.7 η ³)
Ba a (F) @ 25 (1.72 a)	25.0	η (4.5 η ³)
	C = 6.5 (K = 5.58)	
Ba a F	C = 5.0 (K = 5.78)	

Control Operation

942F Mechanical Clock Timer - 7 Day or 12 Day

Ba a	8-30 η
F ₂ Fa	9 η

962F Microprocessor Demand

Ba a	4 60 η
Fa	2 19 η

962 FTC Electronic Time Clock

Ba a	4 60 η
Fa	2 19 η

Interval Regeneration.....Da - a

Valve Connections/Dimensions

a - a	2-1/2 - 8, ηa
I ↓	1-3/4 - 12 C-2A, ηa
Da L	3/4- , ηa
B L	3/8- , ηa
D ↓ .D.	1.050 - (27 ηη)
D L -	1/2 1/2 - (13 ηη 13 ηη) a a

Operating

a B	Ga - a
C η	C η a
- (a - C)	4.5 (2.0)
a η ↓	12 AC 400 ηA (4.6 A)
a η I	115 50/60 H , 230 50/60 H
	100 50/60 H
↓ a	10 120 (1.37 8.27 a)
	Ca a a: 20 100 (1.37 6.89 a)
a η a	34° 100°F (1° 38°C)

Options

B a a , V _a 1265	1-3/4 - 12 C - 2A ηa
B a I ↓ F K :	
C , a A a	1-1/4- , 1- , 3/4- , 28-ηη, 22-ηη
C C, A a	1- , 3/4- , 25-ηη
a B A a	1- ηa , 3/4- ηa
B a B A a	1- ηa , 3/4- ηa

Flow Meter 962 Control 1- - A

4.1 a a .

1.2 Installation

A. The water supply line should be installed in a location that is accessible and not subject to freezing temperatures.

Location Selection


1. The water supply line should be installed in a location that is accessible and not subject to freezing temperatures.
 2. The water supply line should be installed in a location that is accessible and not subject to freezing temperatures.
 3. The water supply line should be installed in a location that is accessible and not subject to freezing temperatures.
 4. The water supply line should be installed in a location that is accessible and not subject to freezing temperatures.
- If a check valve is installed, make certain the water heating unit is equipped with a properly rated temperature and pressure safety relief valve. Also, be certain that local codes are not violated.

5. The water supply line should be installed in a location that is accessible and not subject to freezing temperatures.
6. The water supply line should be installed in a location that is accessible and not subject to freezing temperatures.
7. The water supply line should be installed in a location that is accessible and not subject to freezing temperatures.

Water Line Connection

The water supply line should be installed in a location that is accessible and not subject to freezing temperatures. The water supply line should be installed in a location that is accessible and not subject to freezing temperatures.

Not in Bypass

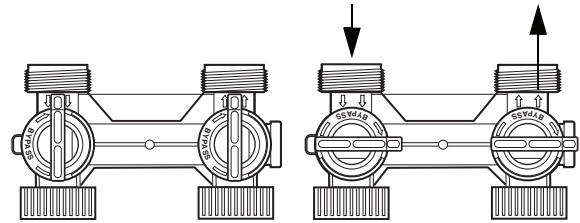

F 1.1 - A

1265 B a a

F 1.2 - a G a B a n

Drain Line Connection

Note: The drain line should be installed in a location that is accessible and not subject to freezing temperatures.

1. The drain line should be installed in a location that is accessible and not subject to freezing temperatures.
2. The drain line should be installed in a location that is accessible and not subject to freezing temperatures.
3. The drain line should be installed in a location that is accessible and not subject to freezing temperatures.

F

. A

8H ,

A a — a . F — ;
a .
1. a a —
a a — .

Note: —
— a a . V a a
— a a COUNTERCLOCKWISE
a . (,
a a a
a a a .)

2. a a COUNTERCLOCKWISE
— BACKWASH.

3. F a a — a .
a. — a , a — a a ()
—
a a
a x a a — 1/4 .

IMPORTANT: | a a , a a
a a . | — 1/4 , — a
a a a a .

a. — a — a — a
a (a a) , — na a a — a .
. A a a a .
. a a — a a
a na . a a a a
a na a .

4. A a a (a).
— a — , a a x na
4 a (15) a a . |—
a — a a a a na — na —
a , a a — a x na
1 — (25 na) a — a na.

5. a — a .
a. — — a — a na ,
a a a — a
COUNTERCLOCKWISE — —
BRINE REFILL . H a—
a a — —
— a . D na — a
na .
. A a — a
COUNTERCLOCKWISE —
— **BRINE/SLOW RINSE**

A a — a
COUNTERCLOCKWISE —
REGENERATION COMPLETE a
 a a a a — a
 a a .

A က ဃ အ :

a. A — အ—အ က အ
 (အ က အ)
 — ကအ အ— အ . Ba အ

က အ အက က က 15 က
 အ . အ — အ —

 အ .

Ca က အ— အ အ အ
က က က 12 အ အ
 အ အ အ .

. A — အ အ က
 အ အ အ အ BACKWASH

COMPLETE.

100 VAC, 115 VAC, and 230 VAC units:

1.4 Disinfection of Water Conditioners

— နာ အ
အ အ —
— နာ အ အနာ အ အ . H ,
— နာ
အ အ အ — , အ
အ အ အ , —
အ အ အ . | အ , နာ
, အ နာ နာ — အ
နာ နာ အ — အ နာ အ

— — အ
အ အ , နာ
— နာ , အ အ
— အ နာ .
D — ;
; — အ , အ —
အ အ အ အ , အ အ နာ အနာ —
နာ .

Sodium or Calcium Hypochlorite

Application

— 112 —

5.25% Sodium Hypochlorite

a C y B a * . l a a n -
- , a -

a a .

1. D a

a. : 1.2

. - } a : 0.8

2. B a

a. Ba a — a a —
a a —
— a . (— a — — a
a a — a
— .)
— a a .

Calcium Hypochlorite

Ca ၁၀၀ မြို့နယ်၊ ၇၀% အလယ်မြို့နယ်၊
အလယ်မြို့နယ်၊ အလယ်မြို့နယ်၊
အလယ်မြို့နယ်၊ အလယ်မြို့နယ်၊
အလယ်မြို့နယ်၊ အလယ်မြို့နယ်၊

1. D a

a. a (a y ma 0.1)

[illegible]

*C_yB a a a n a - C_yC n a .

2.2 Programming and Application

962
 2.4.1
 (a 2.4)
 "1."

Note: I a

Day of Week/Time of Day

SET
 Da
 UP ARROW (↑)
 DOWN ARROW (↓)
 LEFT ARROW (←)
 3()15 a

Level I Parameters (Table 2.1)

L I a a a
 LED a
 DOWN ARROW (↓)
 L I a a a
 Da
 Ha
 a An
 Ca a
 DOWN ARROW (↓)
 Da
 UP ARROW (↑)
 a 2.1 a
 SET
 UP ARROW (↑)
 DOWN ARROW (↓)
 LEFT ARROW (←)
 LEFT ARROW (←)
 Note: I
 UP ARROW (↑)
 DOWN ARROW (↓)
 10
 LEFT ARROW (←)
 C
 SET
 A a 30
 Da a
 Ca a

Salt Amount

a An — z a a . — a
 a a An 6 (2.7 an)
 a ; a 2.2 a .

Note: — — a an a a
 a , . l 6
 a a , — SET a — a —
 n . l 6 a a , — DOWN
ARROW (↓) .

Capacity

Ca a — z a a a z
 a (an). a 2.2 —

Table 2.2 - Suggested Settings for P4, P5, P6, P7

P5 Capacity Setting K a (K aη)	η a ()				
	3 3 (85)	4 3 (113)	5 3 (142)	6 3 (170)	7 3 (198)
P4 Salt Setting: () a					
60 (3.9)	18 (8.2)	-	-	-	-
80 (5.2)	-	24 (10.9)	-	-	-
84 (5.4)	30 (13.6)	-	-	-	-
90 (5.8)	45 (20.4)	-	-	-	-
100 (6.4)	-	-	30 (27.2)	-	-
112 (7.2)	-	40 (18.1)	-	-	-
120 (7.7)	-	60 (27.2)	-	36 (16.3)	-
140 (9.0)	-	-	50 (22.7)	-	42 (19)
150 (9.7)	-	-	75 (34)	-	-
168 (10.8)	-	-	-	60 (27.2)	-
180 (11.6)	-	-	-	90 (40.8)	-
196 (12.7)	-	-	-	-	70 (31.8)
210 (13.6)	-	-	-	-	105 (47.6)

2.4. a L a a a a 6 22 a
a L a a a , a a
a - - DOWN ARROW (↓) a UP
ARROW (↑) - . A a
a .
a 2.4 - a a a a -
a a . - UP ARROW (↑) -
DOWN ARROW (↓) a a a a a a
- a . a - a a a
a 2.1 a a 2.4. - a
22, - a a 1.
- a a a a a a
a , - LEFT ARROW (←)
a - a a a - a a a . -
SET a a a a a a
a a . | a - a a ,
UP ARROW (↑) - DOWN ARROW (↓)
LEFT ARROW (←) a a a , -
SET a a a a a
a a . | a a ,
a a a a a a 2.4
a a a - a a a .
a a a a a , - LEFT
ARROW (←) - a a a -
a . - UP ARROW (↑) -
a (↓) a a a a
- a .
a L a a a a a , a a
a - - DOWN ARROW (↓) a UP
ARROW (↑) - , a 30
a a - a a a
a a Ca a .
a a a a a - a
- a a a a a a
a a a a - a a
a a a a .

၁၂၈၈ ၆ SET ၁၂၉၁
 ၁၂၉၂ ၂.၂ ၁၂၉၃
 ၁၂၉၈ ၇ SET ၁၂၉၉
 ၁၂၉၉ ၂.၂ ၁၂၉၉
 ၁၂၉၉ ၁၂၉၉ ၁၂၉၉ ၁၂၉၉
 ၁၂၉၉ ၁၂၉၉ ၁၂၉၉ ၁၂၉၉
 ၁၂၉၉ ၁၂၉၉ (၁၀) ၁၂၉၉
 ၁၂၉၉ B D ၁၂၉၉ / ၁၂၉၉
 ၁၂၉၉ ၁၂၉၉ ၈.

20 20 19 = 3 4.
 K-
 21
 1

E Da — a / a a
 a a — LEFT ARROW (←)
 a — DOWN ARROW (↓)
 a a 3 a a a
 1, 2, 3, ., a . a a
 a / a a . a a
 a a , a — 0 a 1. a a a
 a a 30 .
 a a a
 a a a
 a / a a .

#	Description of Parameter	Set as required 0 = No - 1 = yes	Notes
1	a	A	0 = a a 1 = a a - a
2	V ₁ a	A	0 = a a 1 = a a - a
3	a	A	0 = a a 1 = a a - a
4	a	A	0 = a a 1 = a a - a
5	- a	A	0 = a a 1 = a a - a
6	F a	A	0 = a a 1 = a a - a
7	a a	A	0 = a a 1 = a a - a

Fixed Reserve

[illegible]

2.3 Conditioner Programming Tables

Table 2.4 - Level II Programming Performa Cv 962 Parallel Multi Tank or Single Tank Conditioner

Parameter	Description	Range of Values	Minimum Increment	Recommended Program Value	Units of Measure	Notes
6		2-200	1	Selected from Table 2.2		
7	B a a	2-200	1	Selected from Table 2.2		
9	Ba a n	4-60	1	14*	V _h	*V _h a a a

G 3.2 a γ a a — a n n a a n — a .

Table 2.5 - Programming Performa Cv 962TC Electronic Time Clock Conditioner

Parameter	Description	Range of Values	Minimum Increment	Recommended Program Value	Units of Measure	Notes
1	Daily Data	(1-7) 1:00-12:59 A (1-7) 0:00-23:59	(1 a) 1	Current Day and Time	H	13. F =1, =2, E=3, ED=4, H =5, F I=6, A =7,. HI I HE LEF DIGI HE DI LA
2	Annual Data	1:00-12:59 A 00:00-23:59		As required	H	13
3	Annual Data			10		
4	Annual Data	.5-125.0 .2-50.0	.5 .2	Selected from Table 2.2	K	
5	Annual Data			10		
6		2-200	1	Selected from Table 2.2		
7	B	2-200	1	Selected from Table 2.2		
9	Ba	4-60	1	14*		*V
10		7-125	1	40*		*V
11	Fa	2-60	1	4*		*V
12		0-1	1	0		0 = , 1 =
13	C	0-1	1	0		0 = 12 , 1 = 24
14	I Ca	0-30	1	0	Da	0 = - *V
15	D			0		
16	D			30		
17		3-4	1	6		6 = 962 C
18	a e a L	0-1	1	0		0 = , 1 = a /Ca a a
19	D					
20	D					
21		0-254	1	60		
22	Fa D - CHA GE			99		

G 3.2 a γ a a 一 aηη a aη 一 a .

3.0 Performa Cv Filter Valve and Controls, 962F, 962FTC, 942F

3.1 Programming and Application

Table 3.1 - Programming Performa Cv 962F Three Cycle Filter

Parameter	Description	Range of Values	Minimum Increment	Recommended Program Value	Units of Measure	Notes
1	Day of the week	(1-7) 1:00-12:59 A (1-7) 0:00-23:59	(1 day) 1 day	Current Day and Time	H day	13. F = 1, V = 2, E=3, ED=4, H =5, F I=6, A =7, HI I HE LEF V DIGI HE DI LA
2	Time of day	1:00-12:59 A 00:00-23:59		As required	H day	13
3	Temperature			10 100	day	
4	Temperature			0.5		
5	Fuel			As required	day	D (day) = 100 a D (day) = 10 a 5.
6	Temperature			200		
7	Temperature			200		
9	Battery	7-60	1	14*	day	*V = 100 a
10	Temperature			8		
11	Fuel	9-60	1	9*	day	*V = 100 a
12	Temperature	0-1	1	0		0 = , 1 = day
13	C	0-1	1	0		0 = 12 1 = 24
14	Temperature	0-30	1	0	Da	0 = a a
15		0-3	1	0	F a a E a a a a a 2 a 24.	0 = na, 1 = F 2 = na 3 = F na
16	F	0-70	1	30		na Da A a
17	a	0-7	1	4		4 = F na C
18	a e a L	0-1	1	0		0 = , 1 = a /Ca a
19	F	1-4	1	1		1 = 1 A, 2 = 2 A D K-a, 4 = D E a
20	K-a E a	0.01-255.0	0.01	0.01		na V K-a E a
21	na D a	0-254	1	60		na na na a
22	Fa D CHA GE			99		

Table 3.2 - Programming Performance Cv 962F Five Cycle Filter

Parameter	Description	Range of Values	Minimum Increment	Recommended Program Value	Units of
-----------	-------------	-----------------	-------------------	---------------------------	----------

G 2.2 a 2 a a 1 1000 1000 1 a .

Table 3.3 - Programming Performa Cv 962 TC Electronic Time Clock Filter

Parameter	Description	Range of Values	Minimum Increment	Recommended Program Value	Units of Measure	Notes
1	Day of the Week	(1-7) 1:00-12:59 A V _h V _h V _h (1-7) 0:00-23:59	(1 a) 1 V _h	Current Day and Time	H V _h F a	a =1, V _h =2, E=3, 13.

G 2.2 a χ a a — aηη a aη — a .

Electronic Time Clock Operation

When the system is in the "On" position, the clock will automatically start the backwash cycle. The backwash cycle will run for a set time, typically 10 to 15 minutes, and then stop. The system will then return to the "On" position and continue to filter the water.

The backwash cycle can be manually initiated by pressing the "Backwash" button. The system will then run the backwash cycle for the set time and return to the "On" position.

Interval Backwash — The system will automatically initiate a backwash cycle at a set interval, typically every 30 minutes. The backwash cycle will run for a set time, typically 10 to 15 minutes, and then stop. The system will then return to the "On" position and continue to filter the water.

Day of Week Backwash — The system will automatically initiate a backwash cycle at a set time of day, typically every 2.3 hours. The backwash cycle will run for a set time, typically 10 to 15 minutes, and then stop. The system will then return to the "On" position and continue to filter the water.


Application

The system is designed for use in a variety of applications, including residential, commercial, and industrial. The system is designed to be easy to install and use, and it is designed to provide a high level of performance and reliability.

Dual and Triplex Conditioners and Filters

The system is designed to be used in a variety of applications, including residential, commercial, and industrial. The system is designed to be easy to install and use, and it is designed to provide a high level of performance and reliability. The system is designed to be used in a variety of applications, including residential, commercial, and industrial. The system is designed to be easy to install and use, and it is designed to provide a high level of performance and reliability.

η - α α η



Da Da Ba a a
na a a a 942F

a - a . - - a
 a a a y a a 2:00
 a.n.l - a - a a a
 a a n , n - n a
 a .F y a n , - a - a a a
 4:00 a.n., C D a E a - a -
 a a n a .

χ . Da — — a
 C Da a a
 a a a — a

1. a a a .
2. - - a () - a () - - a
 a a

NOTE: EX DA
a a a a
a 2:00 a.m. Ca a Ca
EX DA
a a a
a a a 2:00 a.m.
a a F E

DA .

E_2 a a 1 a
 ka a 1 ka a a a 1
 1 ka a 1 1 a K

[illegible]

— ၈၁C 942F ၁၂4

— ၁. — ၁ ၁ ၁ ၁ ၁

— — ၁ 12:00 a.m. (၈ —) ၁

12:00 .၈. (—) ၁ ၁ — ၁

— ၈ 1 — 12, — 1 1:00 a.m. —

— ၁ 12:00 .၈. (—) ၁ 12:00


a.m. (၈ —) ၁ ၁ — ၁ —

၈ 13 — 24, — 13 1:00 .၈.B

— ၈ ၁ ၁

Adjusting the Backwash Setting

Ba a Da (F 3.2) a a
 n . I a K BACK A H
 Q V LE E , a Ba a Da
 a a a a
 .A a a
 a a a a
 a a a a Ba a Da
 na a Ba a Da
 W E a a n .

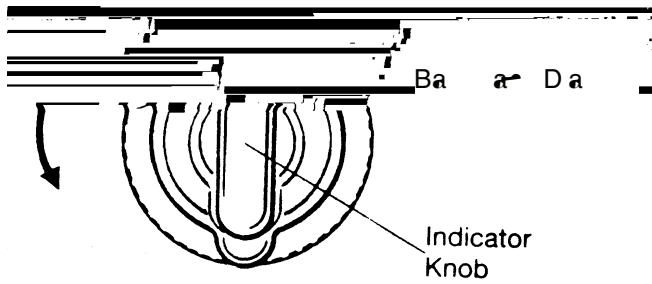

F 3.2 Ba a C n

Table 3.4 - Cycle Times for 942F Control

Cycle	Time (Minutes)
Ba a	8 - 30
	9


3.3 Explanation of Parameter Values for the 962 Single and Parallel Tank Controls

— a a a γ a a — an n a an — 962 .

Number	Description of Program Values	Explanation
--------	-------------------------------	-------------

4.0 Performa Cv Performance Charts and Graphs


4.1 General Specification

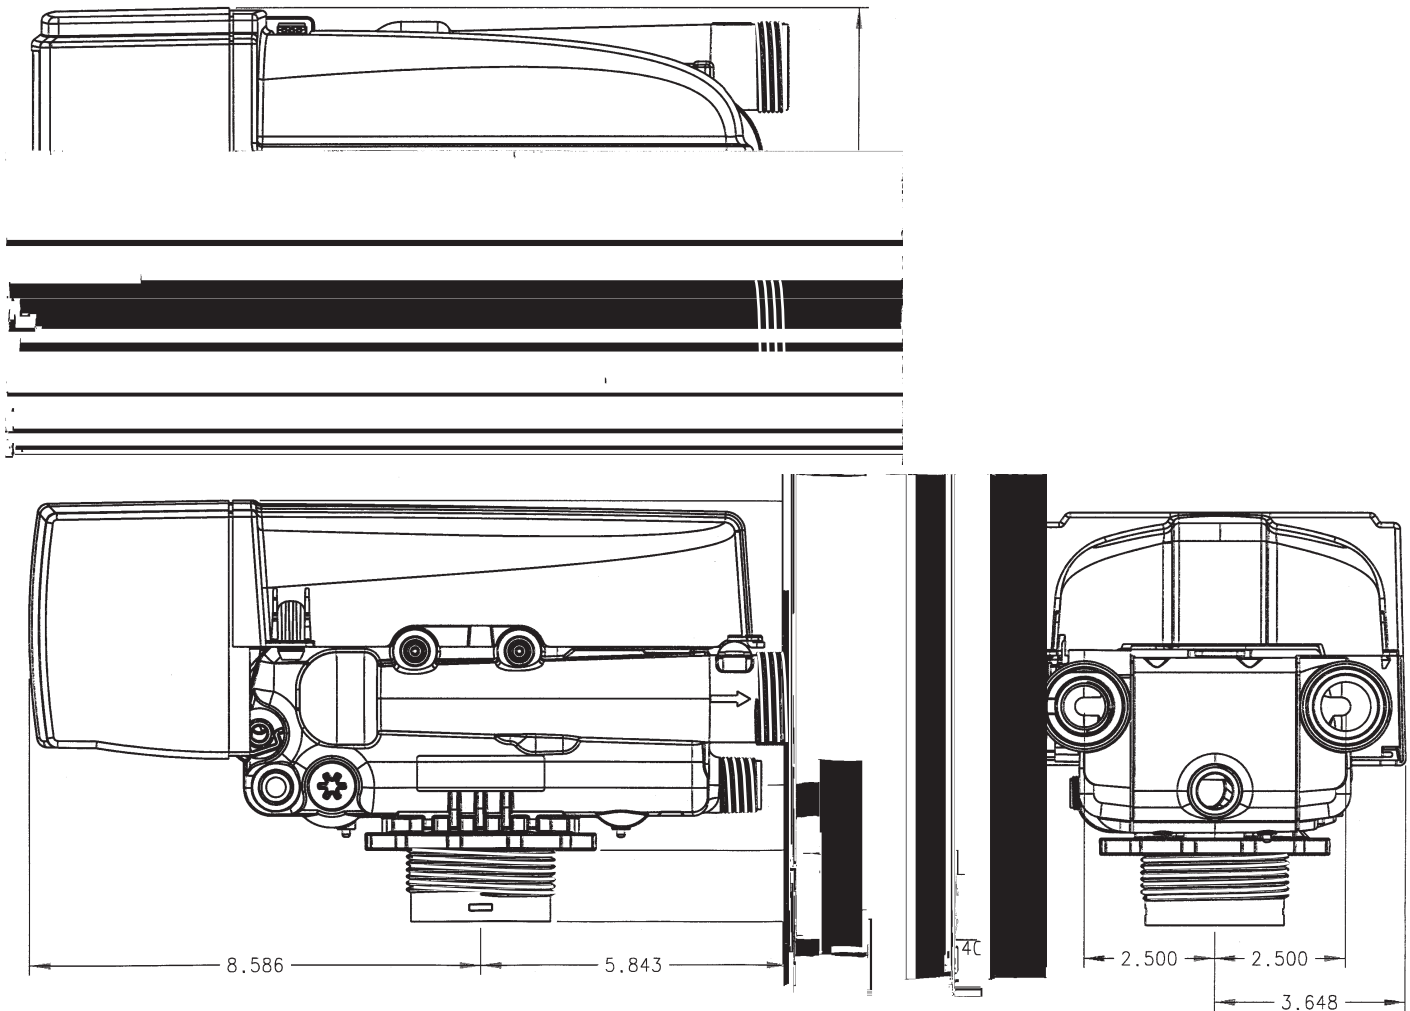


H	a	300	(20.69 a)
a	a	E a a	20-120 (1.38 - 8.27 a)
		942F: 7 a 12 a /24 50 H 12 a n , 60 H 120 a 12 a n		
E	a	C (a a a)60- (1.5-n) 3-
	a	a	2-1/2- 8na
	D	an	1.050- D (26.7-nn)
	L	a	1/2 1/2 (13nn 13nn) a
a	a	C	1- (25.4-nn) a a
a	a	C	1-1/4- , 3/4- , 22-nn, a 28-nn a a
		3/4- B , 1- B , 1- a		a a
		3/4- , 1- , 1-1/4- , 25-nn C C		a a
B	L	C	3/8- na
D	a	L C	3/4- na
a	B	a a	a a , 1- , a
C	V	a A a	a
	G	C n	a
an	C	(n)	942F: A a a 7- 12- a E , G na , F , la a , a , Ja a	
		962, 962F, 962 C, 962F C: A a a E , G na , F , la a , a , Ja a		
B	C	0.74 a	1.3 G V
E _y	a	Ba a C5, 7, 10, 12, 15, 20 G V B 20 G V n


4.2 Injector Curves


Injector "L" in a Performa Cv Valve

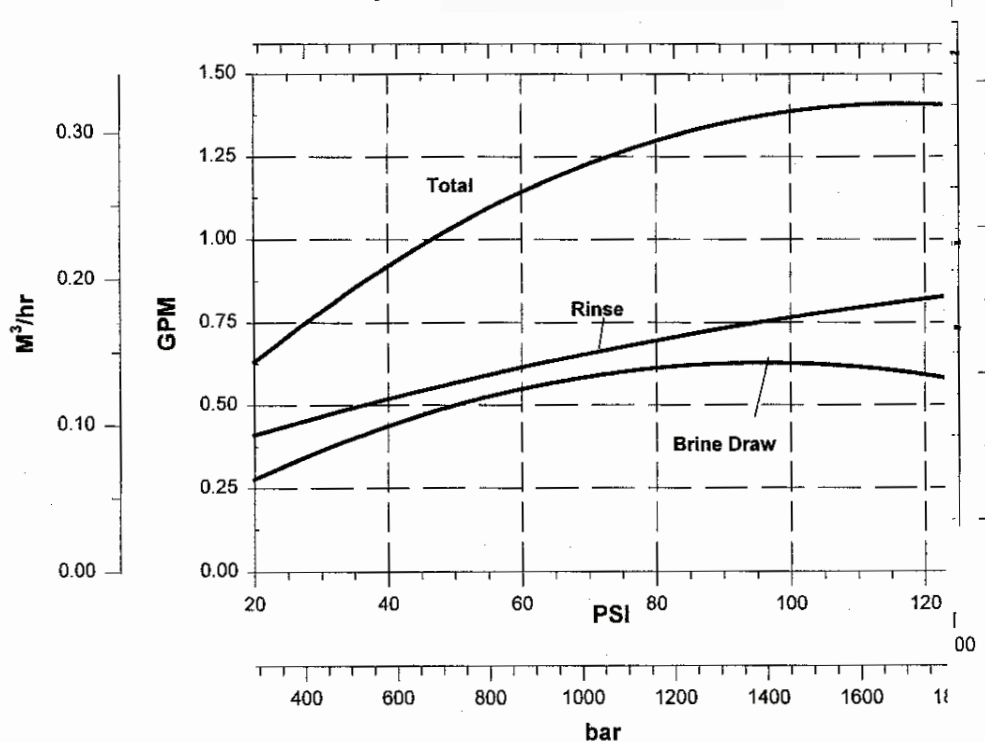

Injector "M" in a Performa Cv Valve

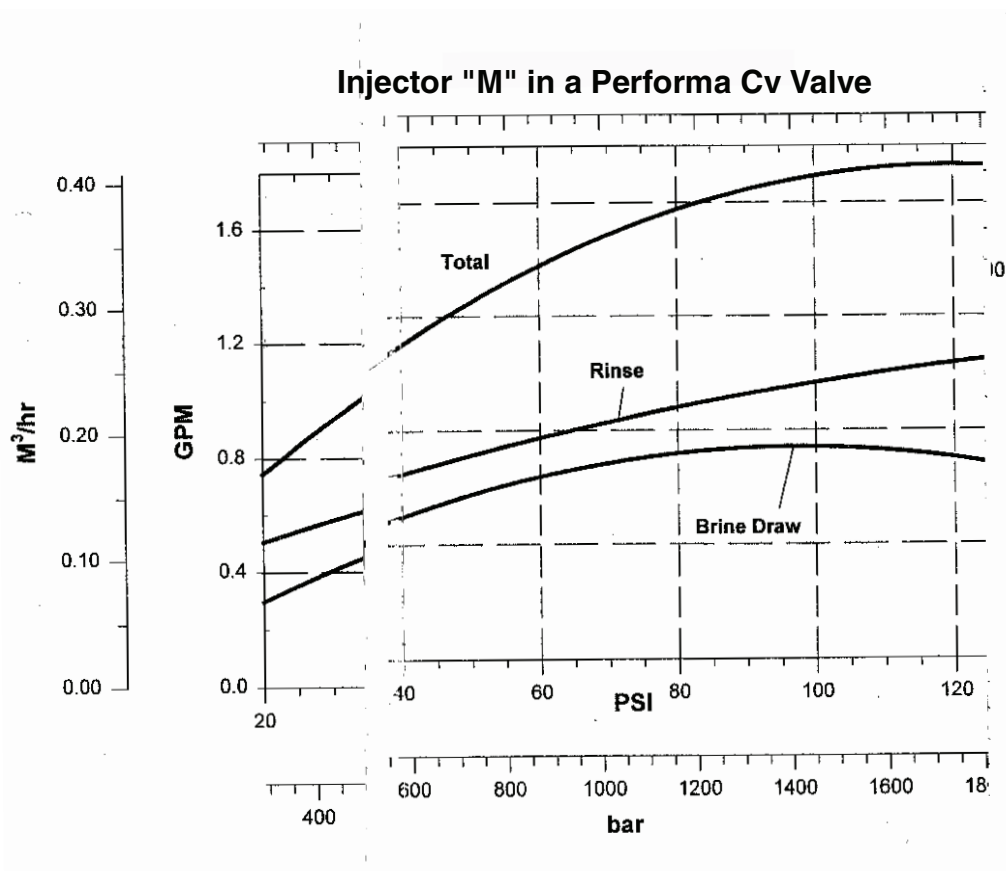

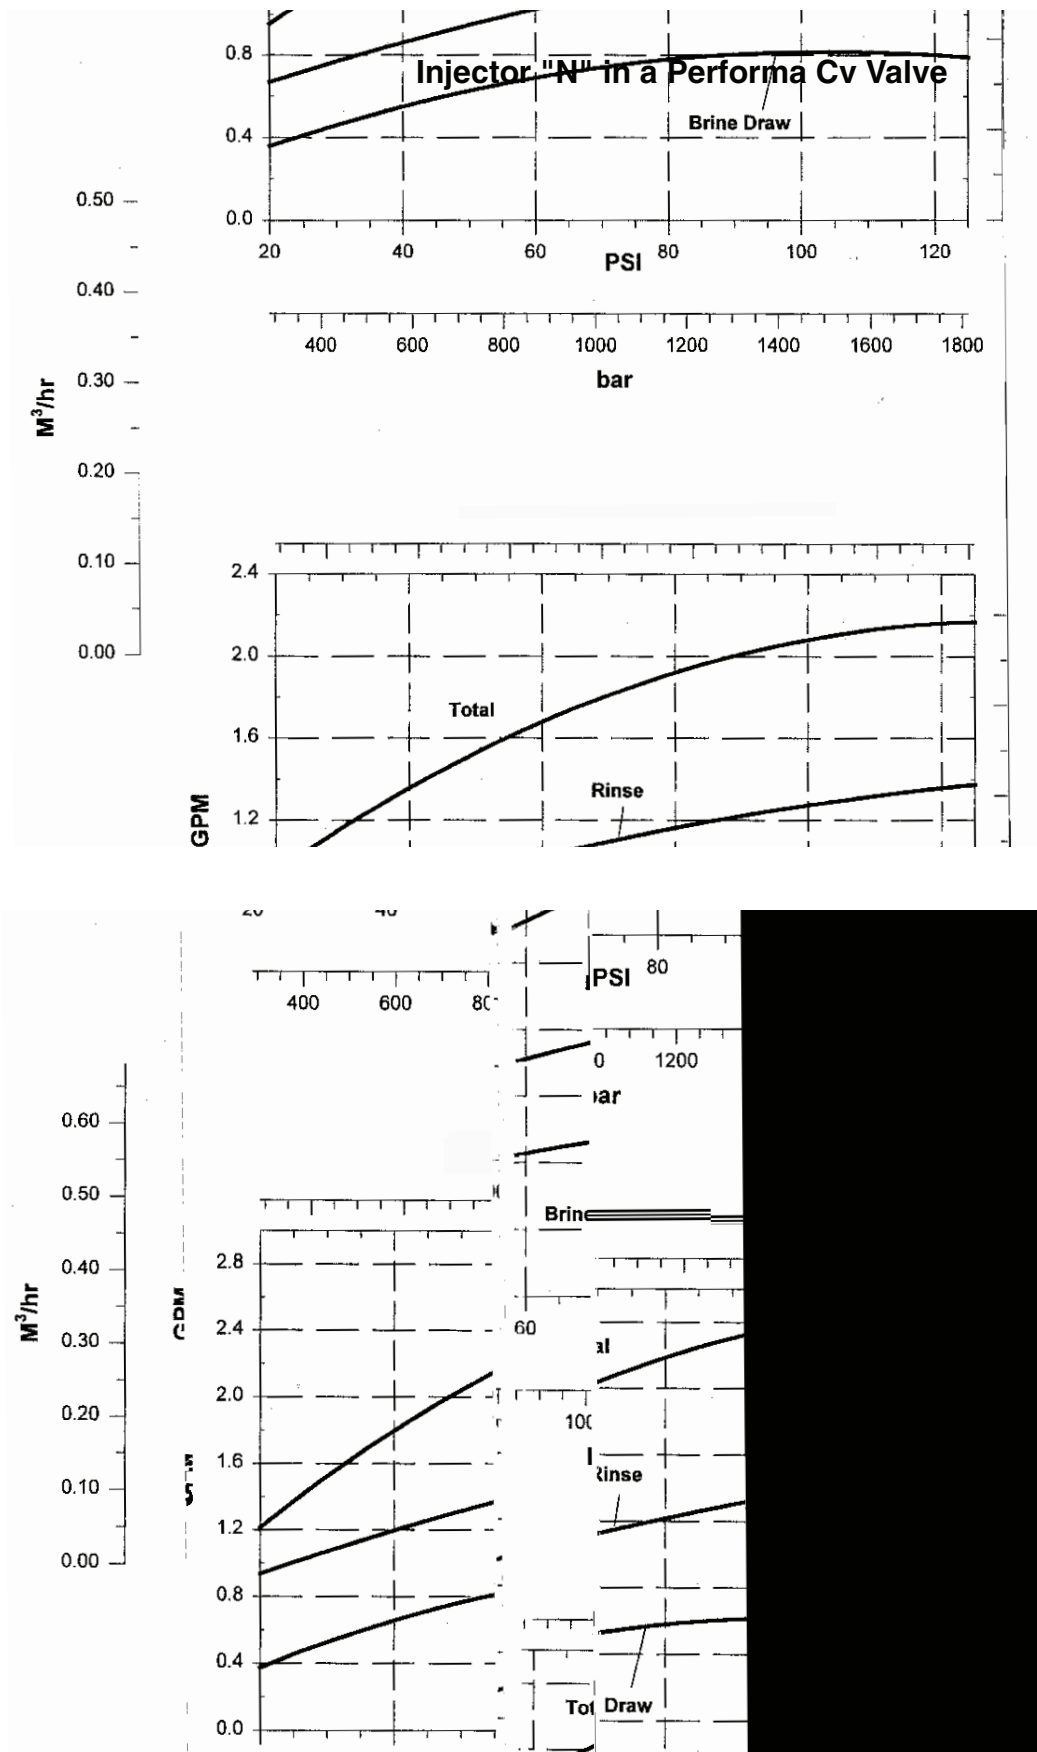

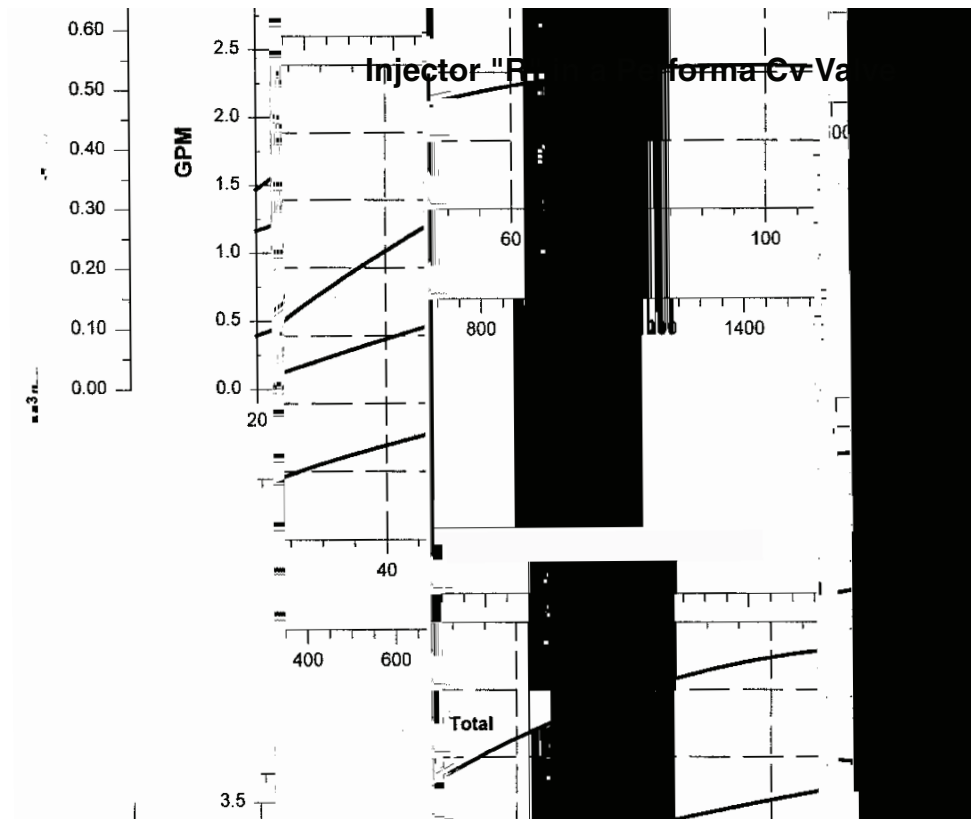

4.3 Performa Cv Conditioner Performance Data

Table 4.1 - Performa Cv Injector Performance Chart

Injectors L - R Flow Rate Charts (gpm)										
PSI	L		M		N		Q		R	
	Draw	Rinse	Draw	Rinse	Draw	Rinse	Draw	Rinse	Draw	Rinse
20	0.26	0.4	0.3	0.5	0.4	0.65	0.4	0.9	0.45	1.2
30	0.3	0.45	0.4	0.55	0.45	0.75	0.5	0.95	0.5	1.3
60	0.5	0.6	0.6	0.8	0.75	1	0.82	1.4	0.9	1.75
80	0.6	0.65	0.7	0.85	0.8	1.1	0.9	1.6	1	2
100	0.6	0.76	0.7	0.9	0.8	1.6	0.95	1.8	1.1	2.2
Injectors L - R Flow Rate Charts (Lpm)										
Bar	L		M		N		Q		R	
	Draw	Rinse	Draw	Rinse	Draw	Rinse	Draw	Rinse	Draw	Rinse
1.4	0.98	1.5	1.1	1.9	1.5	2.5	1.5	3.4	1.7	4.5
2.1	1.1	1.7	1.5	2.1	1.7	2.8	1.9	3.6	1.9	4.9
4.2	1.9	2.3	2.3	6	2.8	3.8	3.1	5.3	3.4	6.6
5.6	2.3	2.5	2.6	3.2	3	4.2	3.4	6	3.8	7.6
7	2.3	2.9	2.6	3.4	3	4.9	3.6	6.8	4.2	8.3

Table 4.2 - Service and Backwash Flow Performance Data

Flow vs Pressure Drop (gpm)			Flow vs Pressure Drop (Lpm)		
PSI	Service (Cv 6.5)	Backwash (Cv 4.0)	Bar	Service (Cv 6.5)	Backwash Cv 4.0)
5	15	9	0.35	56	34
10	20	13	0.7	76	49
15	25	16	1	95	61
20	29	18	1.4	109	68
25	32	20	1.7	121	76
30	35	22	2.1	132	83

Table 4.3 - Recommended Drain Flow Controls (Backwash Anion and Cation Resin @ 55°F (12.7°C) Water Temperature

Tank Diameter Inches (mm)	Bed Area sq. ft.	Anion Resin @ 3 gpm/sq ft (m ³ /h/sq ft)	Cation Resin @ 5 gpm/ sq ft (m ³ /h/sq ft)
14 (35.6)	1.02	3 (.7)	5 (1.1)
16 (40.6)	1.38	4 (.9)	7 (1.5)
18 (45.7)	1.76	5 (1.1)	8 (1.8)
21 (53.3)	2.4	7 (1.5)	12 (2.7)

Table 4.4 - Performa Filter

Pressure Loss vs Flow (gpm)		
PSI	Service (Cv 6.5)	Backwash (Cv 5.0)
5	15	11
10	20	16
15	25	19
20	29	22
25	32	25
30	35	27
Pressure Loss vs Flow (Lpm)		
Bar	Service (Kv 5.6)	Backwash (Kv 5.8)
0.35	56	42
0.7	76	61
1	95	72
1.4	109	83
1.7	121	95
2.1	132	102

Table 4.5 - Typical Backwash Flow Requirements for Various Filter Medias (based on 55°F (12.7°C) water temperature)

		GAC/CARBON FILTER-AG, CALCITE			
		GREENSAND			
		BIRM			
		SAND, MULTI-MEDIA			
Tank Dia. inches (mm)	Bed Area sq. ft.	8 gpm/sq ft (Lpm/sq ft)	10 gpm/sq ft (Lpm/sq ft)	12 gpm/sq ft (Lpm/sq ft)	15 gpm/sq ft (Lpm/sq ft)
14 (35.6)	1.02	8 (30)	10 (38)	12 (45)	15 (57)
16 (40.6)	1.38	11 (42)	13 (49)	16 (61)	20 (76)
18 (45.7)	1.76	14 (53)	17 (64)	21 (79)	*26 (98)
21 (53.3)	2.4	19 (72)	24 (91)	*29 (98)	
24 (60.9)	3.14	25 (95)			

* $V_{max} = 25 \text{ ft}^3/\text{min}$ at 1.72 gpm/sq ft

Table 4.6 - Performa Cv Filter Sizing Selection Guide for Dual Unit Filters.


Typical backwash flow requirements for various filter medias (based on 55°F (12.7°C) water temperature.					
		GAC/CARBON FILTER-AG, CALCITE			
		GREENSAND			
			BIRM		
				SAND, MULTI-MEDIA	
Tank Dia. inches (mm)	Bed Area sq. ft.	8 gpm/sq ft (Lpm/sq ft)	10 gpm/sq ft (Lpm/sq ft)	12 gpm/sq ft (Lpm/sq ft)	15 gpm/sq ft (Lpm/sq ft)
14 (35.6)	1.02	8 (30)	10 (38)	12 (45)	
16 (40.6)	1.38	11 (42)	13 (49)		
18 (45.7)	1.76	*14 (53)			
21 (53.3)	2.4				

* $V_{\text{max}} = \frac{Q}{A} = \frac{25 \text{ gpm}}{1.72 \text{ sq. ft.}} = 14.5 \text{ gpm/sq ft.}$

5.2 Preventative Maintenance

Injector Screen and Injector

1. a a a a
2. a a a a
3. C a a a a:
4. 1. a a a a
5. 2. a a a a ()
6. a a .
7. 3. (a a) a a .7
8. 4. a a , a a
9. a (F 5.1).
10. 5. C a a a .F a .
11. 6. a a , a a
12. 7. F a a a
13. a a
14. 8. C a a a
15. 9. L a a a , a
16. a a **silicone lubricant only!**
17. 10. a a , a a
18. a a
19. **IMPORTANT: D** a a a a
20. a a a a a a a a
21. 11. a a a a ;
22. 12. a a a a
23. a () a .

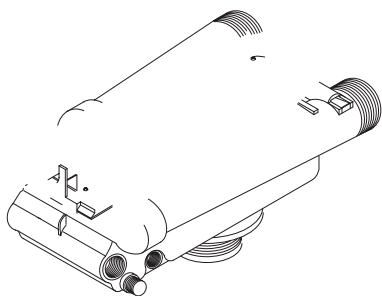

F 5.1


Water Meter Maintenance

1. a a a a 962 C a a
2. a a a a a .l a
3. a a a a a
4. 1. a a a a ()
5. 2. a a a a Ba a Da
6. a a a a) a
7. 3. L a a a / a a 1265
8. a a a a a
9. 4. a a a a , a a
10. a a a a .Ga a a
11. a a a a a a a
12. (F 5.1).
13. 5. Ca a a a a a
14. a a a a a a a
15. a a a a a a a
16. a a a a a a a
17. a a a a a a a
18. 6. Ca a a a a a
19. a a a a a a a
20. a a a a a a a
21. 7. a a a a a
22. a a a a a
23. 8. a a a a / a a 1265 a
24. a a a a a
25. 9. a a a a a a ()
26. a a a a a a a
27. a a a a a a a
28. a a a a a a a
29. a a a a a a a
30. a a a a a a a

* a a a a Ha 0 a a C a a .

5.3 Removing the Valve Assembly for Servicing

1. Remove the cap screw.
2. Remove the cap screw and the valve assembly ().
3. Remove the valve assembly, (F 5.2).

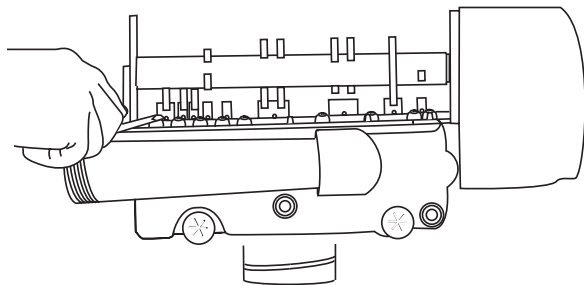

F 5.2

4. Remove the valve assembly, (F 5.3).
5. Remove the valve assembly, (F 5.4).
6. Remove the valve assembly, (F 5.5).

5.4 Removing the Control

C Remove the control, (F 960)

1. Remove the control, (F 960).
2. Remove the control, (F 960).
3. Remove the control, (F 5.3. L).


F 5.3

4. Remove the control, (F 5.4).

F 5.4

5. Remove the control, (F 5.5).
6. Remove the control, (F 5.6).

F 5.5

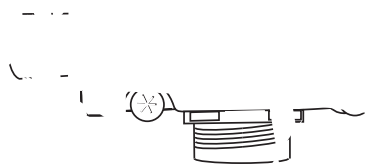


5.6

77


a

a

5.5 Identification of Cor | v

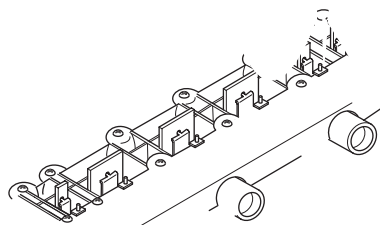


3 Brine/Slow Rinse Position

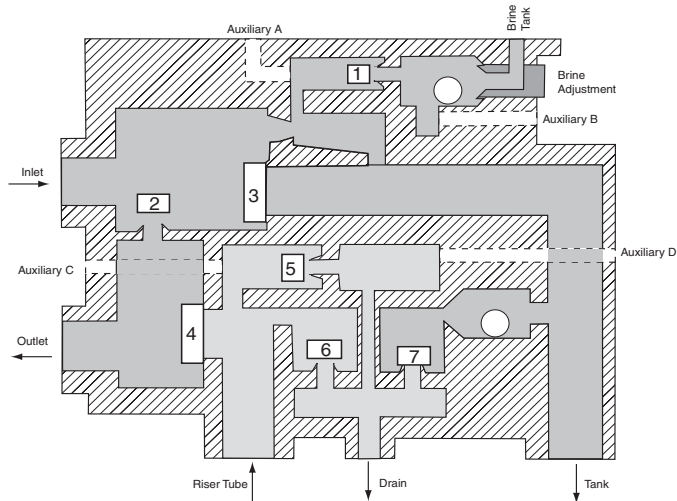


Name	Valve No.
Brine	1 - Open
By-Pass	2 - Open
Inlet	3 - Closed
Outlet	4 - Closed
2nd Tank Top	5 - Open
Purge	6 - Open
Backwash	7 - Closed

4 Fast Rinse Position

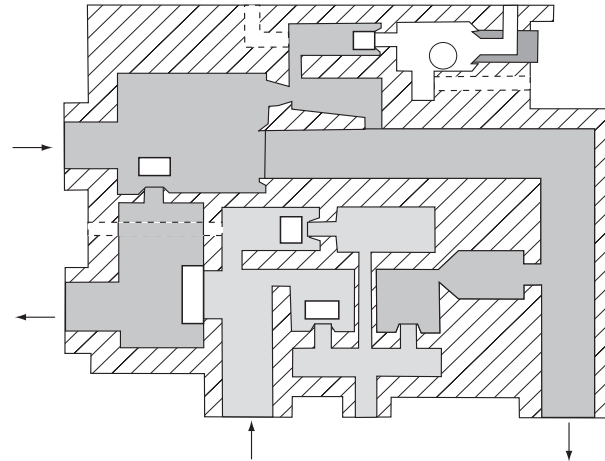


5.8 Performa Cv Filter Flow Diagrams

1 Backwash Position

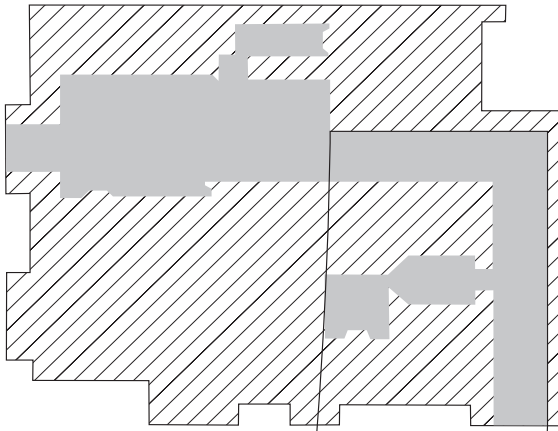

2 Fast Rinse Position

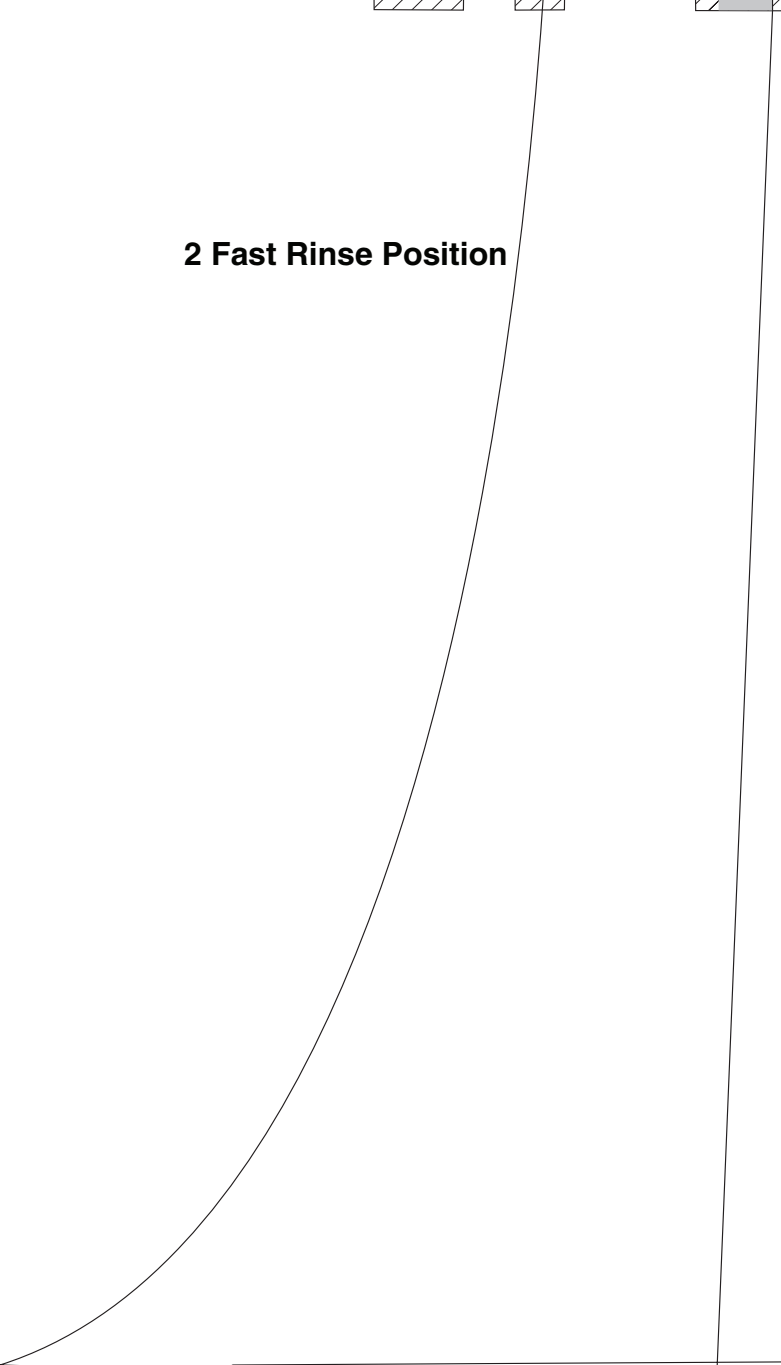

5.9 Troubleshooting

IMPORTANT:

1. If the engine does not start, check the following:

- A. Fuel: Is the fuel tank full? Is the fuel valve open? Is the fuel filter clean?
- B. Spark: Is the spark plug clean? Is the spark plug gap correct? Is the spark plug tight?
- C. Air: Is the air filter clean? Is the air intake unobstructed?
- D. Oil: Is the oil level correct? Is the oil clean?
- E. Battery: Is the battery fully charged? Are the battery terminals clean and tight?
- F. Ignition switch: Is the ignition switch in the "ON" position?
- G. Choke: Is the choke lever in the correct position?
- H. Throttle: Is the throttle cable adjusted correctly?
- I. Compression: Is the compression normal?
- J. Timing: Is the timing correct?
- K. Valve: Are the valves adjusted correctly?
- L. Water: Is there any water in the fuel system?
- M. Obstructions: Are there any obstructions in the fuel or air passages?
- N. Damage: Is there any damage to the engine components?
- O. Assembly: Are all components assembled correctly?
- P. Replacement Parts: Are all replacement parts of the correct specification?
- Q. Storage: Has the engine been stored for a long time? If so, it may need to be run for a few minutes to break the seal on the cylinders.
- R. Weather: Is the weather too hot or too cold? The engine may not start in extreme temperatures.
- S. Fuel Quality: Is the fuel of good quality? Use fresh fuel.
- T. Air Quality: Is the air clean? Avoid running the engine in dusty or dirty environments.
- U. Maintenance: Has the engine been properly maintained? Follow the maintenance schedule.
- V. Operator Error: Are you using the engine correctly? Read the operator's manual.
- W. Defects: Are there any defects in the engine? Contact your dealer if you suspect a defect.
- X. Safety: Are you wearing your seat belt? Do not drink and drive. Do not operate the engine while under the influence of alcohol or drugs.
- Y. Noise: Is the engine making any unusual noises? If so, stop the engine immediately and investigate the cause.
- Z. Emissions: Is the engine emitting any unusual smells or smoke? If so, stop the engine immediately and investigate the cause.

Valve Troubleshooting


Problem	Possible Cause	Solution
1. C	<ul style="list-style-type: none"> a. L a b. I ! c. I ! d. a (2 a / 4) 	<ul style="list-style-type: none"> a. ท ทล 30 b. ท c. C a d. ท ทล ท
2. B a	<ul style="list-style-type: none"> a. Dana b. B a (1) c. a (3 4) d. A a 	<ul style="list-style-type: none"> a. V a a ท b. ท a a c. F ท d. E a
3. ท ท a	<ul style="list-style-type: none"> a. I a a b. F ทล a ! 	<ul style="list-style-type: none"> a. C b. ท a a a
4. I ท a	<ul style="list-style-type: none"> a. L a b. D ! 	<ul style="list-style-type: none"> a. ท ทล 30 b. a
5. a a	<ul style="list-style-type: none"> a. a b. a ! 	<ul style="list-style-type: none"> a. E b. A a c. C a . F
6. C a a a	<ul style="list-style-type: none"> a. I a a b. F ทล a ! 	<ul style="list-style-type: none"> a. a b. ท a a . F
7. F a a	<ul style="list-style-type: none"> a. D a (6 7) a (1) b. a ท a c. a 	<ul style="list-style-type: none"> a. V a a ท b. a
8. Ha a a a	<ul style="list-style-type: none"> a. 8-1.2724()-0.68 J *-0. -1.2724.2()-2-30.2(ท29.77(9.8(9.8()29.8()0.1()-30.2()9.8(()0.1()2)0.1()30.4(-15.7(a)30.4(9.8()49. 	

962 Control Troubleshooting

Alarms

— V 962 n a

Problem	Possible Cause	Solution
6. $\frac{1}{2} \frac{1}{2} \frac{1}{2}$ a. ()	a. B a a a V a a a a a a a a ! D a D a a	a. $\frac{1}{2} \frac{1}{2} \frac{1}{2}$ F a a a a a a a a a a a a a a a a a a a
7. C a a a a a a	a. B a a a	a. $\frac{1}{2} \frac{1}{2} \frac{1}{2}$ a a a
8. C a a a a a	a. a a a a a a a a	a. a a a a a a a a a a a a
9. a a a	a. V a a V a a a a a a I a (H). B a D a A a a (a) B a a a a a a a 125 a a D a a	a. a a a a a a a a a / a a a a a (H). a I a a a a a a a
10. C a a a C a a a	a. B a a D a	a. a a a a
11. C a a a a EGE	a. a a a D a a B a B a a D a	a. C a a a a a a a a a
12. C a a a a EGE	a. I a a a a , a 5 a a I a a a a D a a	a. a 5 a a a a a a a a
13. a a a	a. I a a a F a I a a I a a a a a a a a a a a a a a a a a a a ! E a a a 1/5 a a	a. a / a

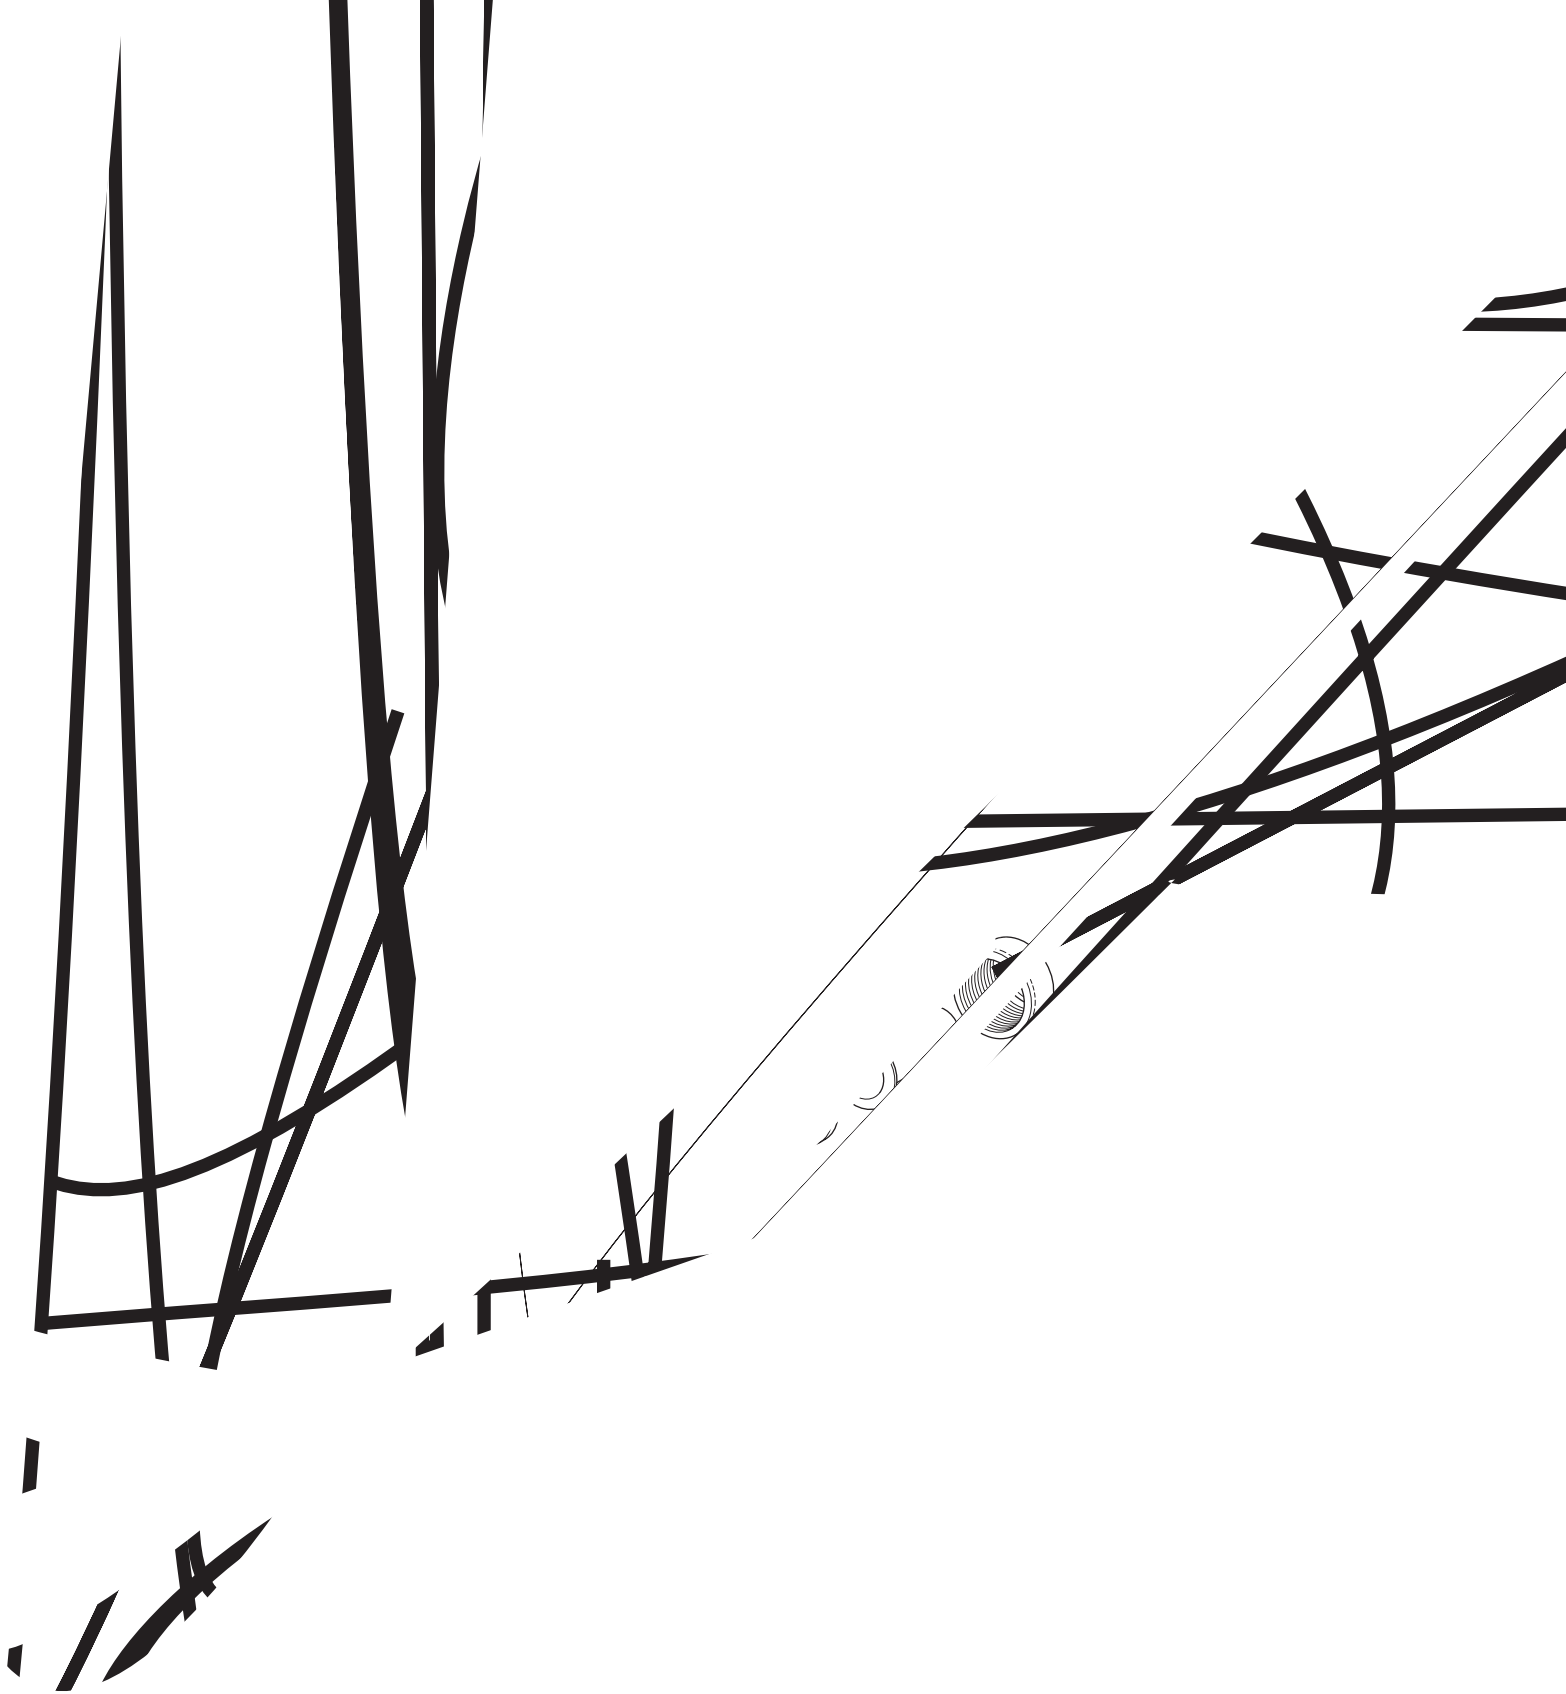

6.3 Performa Cv Controls

